

# Specifications

Principles	Tri-angle Laser scatter Flow Cytometry method Scattergram analysis Impedance method for RBC and PLT counting Cyanide free reagent for HGB test																				
Parameters	25 Reportable parameters WBC, RBC, HGB, HCT, MCV, MCH, MCHC, RDW-SD, RDW-CV, PLT, MPV, PCT, PDW, P-LCR, P-LCC, NEU%, LYM%, MON%, EOS%, BAS%, NEU#, LYM#, MON#, EOS#, BAS# 1 Scattergram 3 Histograms(WBC, RBC, PLT) 4 Research parameter ALY%, ALY#, LIC%, LIC#																				
Test Mode	CBC+DIFF mode Venous whole blood, Capillary whole blood and Prediluted																				
Throughput	60 tests/hour																				
Performance	<table border="1"> <thead> <tr> <th>Parameter</th> <th>Linearity Range</th> <th>Carry Over</th> <th>CV</th> </tr> </thead> <tbody> <tr> <td>WBC</td> <td>1-300x10<sup>9</sup>/L</td> <td>≤0.5%</td> <td>≤2.0%</td> </tr> <tr> <td>RBC</td> <td>0-8.5x10<sup>12</sup>/L</td> <td>≤0.5%</td> <td>≤1.5%</td> </tr> <tr> <td>HGB</td> <td>0-250g/L</td> <td>≤0.5%</td> <td>≤1.5%</td> </tr> <tr> <td>PLT</td> <td>0-4000 x10<sup>9</sup>/L</td> <td>≤1.0%</td> <td>≤4.0%</td> </tr> </tbody> </table>	Parameter	Linearity Range	Carry Over	CV	WBC	1-300x10 <sup>9</sup> /L	≤0.5%	≤2.0%	RBC	0-8.5x10 <sup>12</sup> /L	≤0.5%	≤1.5%	HGB	0-250g/L	≤0.5%	≤1.5%	PLT	0-4000 x10 <sup>9</sup> /L	≤1.0%	≤4.0%
Parameter	Linearity Range	Carry Over	CV																		
WBC	1-300x10 <sup>9</sup> /L	≤0.5%	≤2.0%																		
RBC	0-8.5x10 <sup>12</sup> /L	≤0.5%	≤1.5%																		
HGB	0-250g/L	≤0.5%	≤1.5%																		
PLT	0-4000 x10 <sup>9</sup> /L	≤1.0%	≤4.0%																		
Sample Volume	CBC+DIFF mode: ≤20ul																				
Data Memory	Up to 100,000 results (including histogram, scattergram, patient information)																				
Display Interface	10.4 inches touch screen																				
Communication	1 LAN port, 4 USB ports Bi-direction LIS, support HL7 protocol Internal RFID reader																				
Printout	Support various external USB printers, or WiFi connection (optional) formats user definable																				
Size/Weight	L*W*H = 350*450*430(mm) Weight: 28kg																				
Power Requirement	a.c.100-240V, 50/60Hz																				
Working Environment	Temperature: 10-30 Humidity: 20% - 85% Air pressure: 70~106kPa Working latitude: ≤3500m																				
Calibration	AUTO Calibration																				


# H5910

Auto 5-part Hematology Analyzer




## Principle

- Tri-angle laser scatter + flow Cytometry + impedance method for WBC.  
The 5 part differentiation of the white blood cell can be precisely done by collecting the optical signal when WBC pass through the laser beam.
- The front small-angle optical signal can reflect the information of the cell size.
- The front large-angle optical signal can reflect the information of nucleus' structure and complexity.
- The side angle optical signal can reflect the information of granularity complexity.

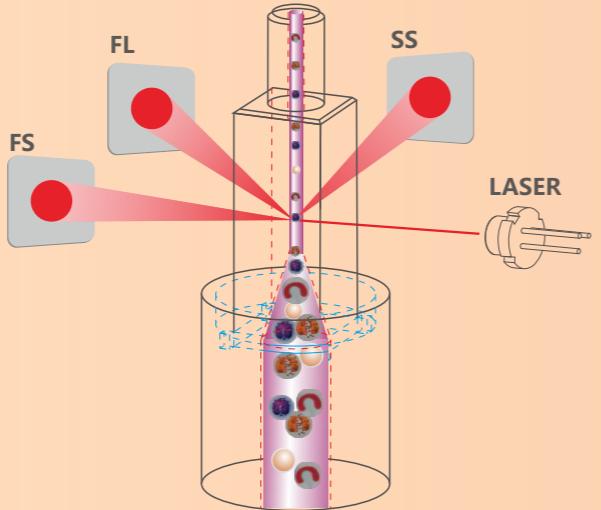

## H5910

Auto 5-part Hematology Analyzer

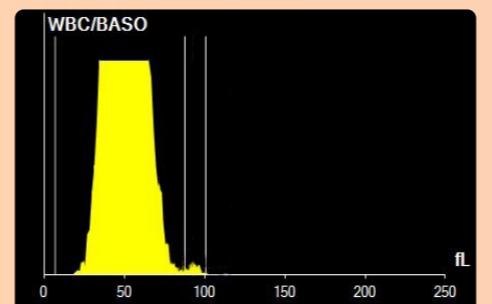

## Independent BASO channel

Basophils (BASO) has important clinical significance, such as Leukemia, Anaphylactic Disease, Hematemesis, Cancer and so on. Real double optical channel test, both for DIFF and BASO, independent BASO channel with optical counting contributes to more precise results.



### Premium large touch screen

High-definition color display,  
Sensitive touch,  
Support the operation of rubber gloves.



### SMART-FLOW fluidic patent technology

The creative SMART-FLOW fluidic technology is a simple and efficient system, which makes H5910 with good reliability and free of maintenance.



### Accurate measurement for low value PLT

Advanced Sweep-Flow technology guarantees low PLT samples counted precisely.

## Built-in thermal printer



### Low volume sample consumption

CBC+DIFF mode  $\leq 20\text{ul}$ , Ideal choice for pediatrics and geriatrics.



### Low running cost

Only three reagents needed for the test, low reagent consumption for single test.

## Compact

- Compact design with reagents on board, save the valuable bench space of small labs.



### Easy to use

ONE touch to start the test, ONE click to remove error, ONE screen for most of the daily operation. Intelligent turn off power switch.

## With one measuring channel